

Radiolink *plus*



2.5t to 200t capacities



Rugged & weatherproof



License Free



High Accuracy



Dual range



Peak & trough hold function




Specifications

Radiolink Plus

Licence exempt radio version of the popular Loadlink.
 Range on standard Radiolink is 100 metres.
 Push button control for tare, hold, trough & peak hold.
 LoadLink is fitted with internal rechargeable batteries.
 Selectable units - tonnes & kN, others available on request.
 Up to fifteen Radiolinks may be displayed on the handheld display.
 May also be connected to a PC using our 'Desktop Controller'
 software package.

Supplied with handheld display, battery charger and carry case.

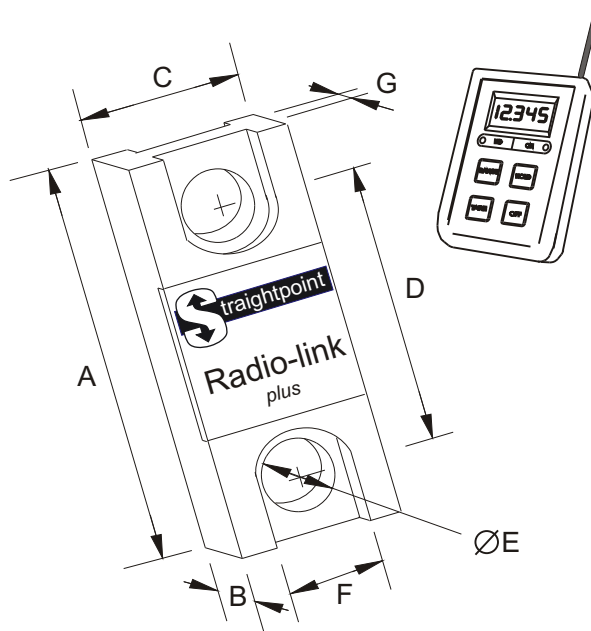

Specifications

Part Number	RLP/2T5	RLP/5T	RLP/10T	RLP/12T	RLP/20T	RLP/25T	RLP/50T	RLP/100T	RLP/200T
Capacity	2,500kg	5,000kg	10,000kg	12,000kg	20,000kg	25,000kg	50,000kg	100,000kg	200,000kg
Resolution	1kg	1kg	2kg	2kg	5kg	10kg	10kg	50kg	100kg
Weight	1.5kg	2.2kg	3.5kg	3.5kg	5.2kg	5.2kg	10.9kg	37kg	80kg
Safety Factor	5:1	5:1	6:1	5:1	6:1	5:1	5:1	4:1	3.5:1
Battery Type	Handheld-AA Alkaline / Link rechargeable alkaline								
Battery Life	Handheld-400hrs / Link-1 year sleep or 15hrs continuous transmission between charges								
Display Type	7 digit 8.8mm LCD								
Operating Temp	-10 to 50c								
Accuracy	+/- 0.3%								
Frequency	868MHz European or 915 MHz								
Range*	100 metres								
Modulation	FM Half duplex								
Data Rate	10 Updates per second								
Protection	IP65/NEMA 4								
Dimension A	204mm	249mm	305mm	305mm	340mm	340mm	400mm	608mm	690mm
Dimension B	43mm	43mm	47mm	47mm	60mm	60mm	75mm	99mm	150mm
Dimension C	101mm	101mm	101mm	101mm	110mm	110mm	151mm	255mm	305mm
Dimension D	146mm	165mm	193mm	193mm	215mm	215mm	230mm	320mm	350mm
Dimension E	24.5mm	38mm	47.5mm	47.5mm	55mm	55mm	66mm	108mm	125mm
Dimension F	47.5mm	66mm							
Dimension G	19mm	32mm							
Crosby Shackle	G210-3.25T	G210-6.5T	G210-12T	G210-12T	G210-25T	G210-25T	G2140-50T	G2140-110T	G2140-200T